



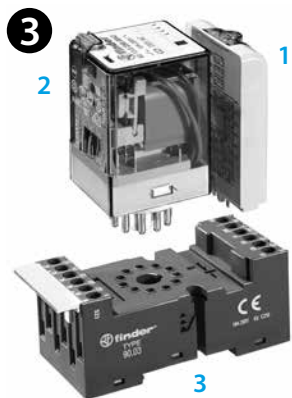



86.00

86.00.0.240.0000	
	U_N (12...240)V AC (50/60 Hz) / DC U_{min} 10.2 V AC/DC U_{max} 265 V AC/DC P 1.2 W
	(-20...+50)°C
IP20	


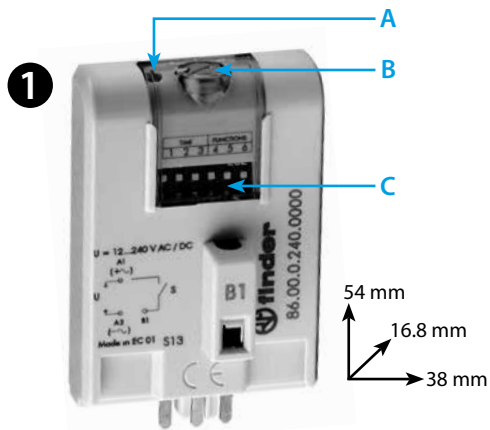


4							
	(0.05...1)s	(0.5...10)s	(5...100)s	(0.5...10)min	(5...100)min	(0.5...10)h	(5...100)h
5							
	(AI)	(DI)	(SW)	(BE)	(CE)	(DE)	(EE)

2 2a

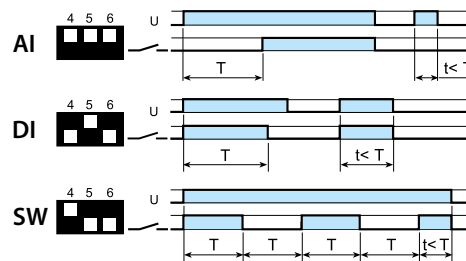

2b

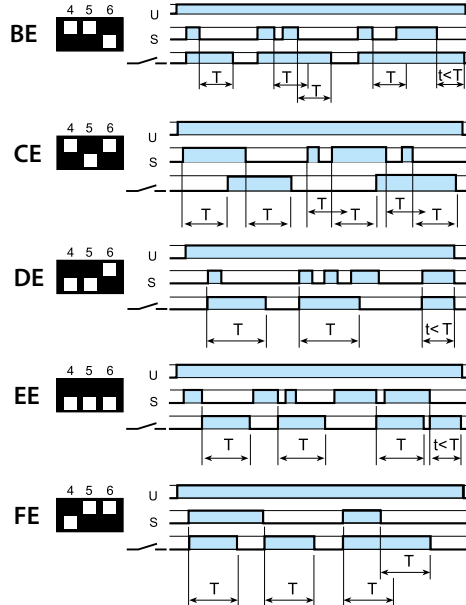

中文版

86.00

多功能、多电压定时器模块

A LED 前视图

B 延时调节微调器

C Dip 开关: 时间刻度和功能

2 接线图及功能

2a 无控制信号 AI 接通延时接线图

DI 间隔

SW 对称闪光器 (启动脉冲打开)

2b 带控制信号 BE 的接线图 带控制信号的断开延迟

CE 带控制信号的开和关延迟

DE 控制信号打开时的间隔

控制信号关闭时的 EE 间隔

控制信号开启和关闭时的 FE 间隔

3 安装 (示例)

1 定时器模块

2 中继

3 插座

123

86.00	56.34	96.04
86.00	60.12	90.02
86.00	60.13	90.03
86.00	62.32	92.03
86.00	62.33	92.03

4 DIP "TIME"

5 DIP "FUNCTIONS"